


10BASE-T

Filter Module


Electrical Specifications: @25 °C

- Isolation Voltage: 1500 Vrms
- Insertion Loss: -1.0dB Maximum @1MHz-10MHz
- Return Loss: -15dB Minimum @5MHz-10MHz
- Cross Talk: -30dB Minimum @1MHz-30MHz
- Attenuation @30MHz
 - Transmitter: -30dB Minimum
 - Receiver: -20dB Minimum
- Cut-off Frequency: 17MHz Typical
- TX I/O Impedance: 100 ohms : 100 ohms
- RX I/O Impedance: 100 ohms : 100 ohms

Mechanicals:

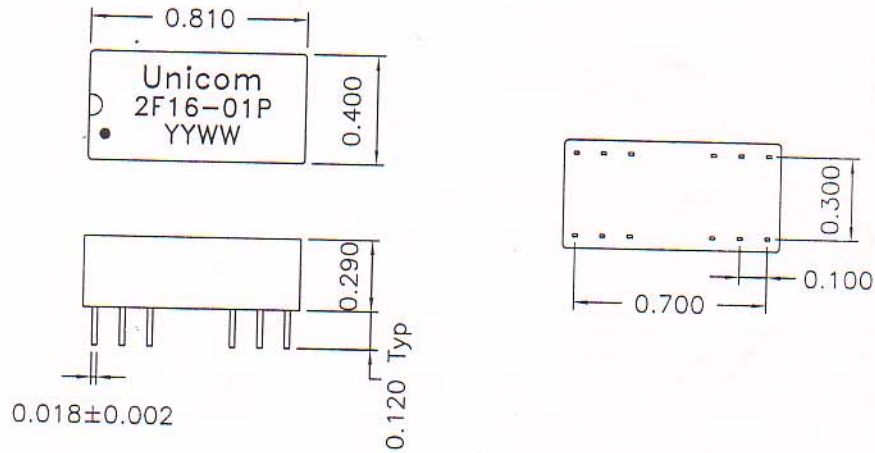

Schematics:

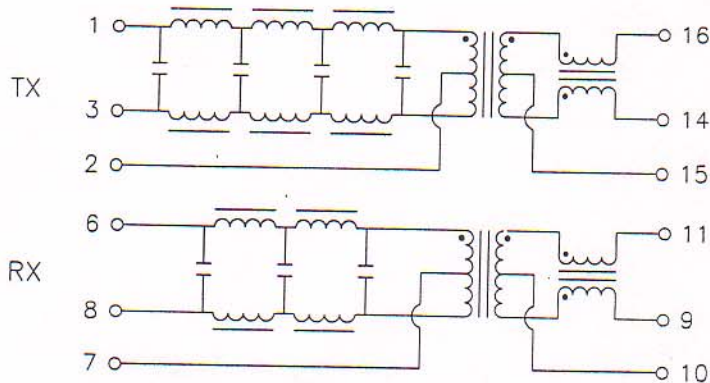

*Specification Subject to Change without Notice

P/N: 2F16-01P	DIMENSIONS IN INCH	Unless otherwise specified Dim. Tolerances are: .xxx ±0.010	REV: B0	DRWN:	DATE: 20030721
	SCALE: NONE		PAGE: 1/1	APPD:	DATE:
Unicom Electronic Corp. • Tel 516-767-8320 • Fax 516-767-7147					