






1. DIMENSIONS:

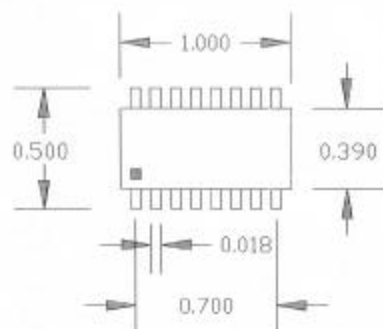

SUGGESTED FOOTPRINT

2. SCHEMATIC:

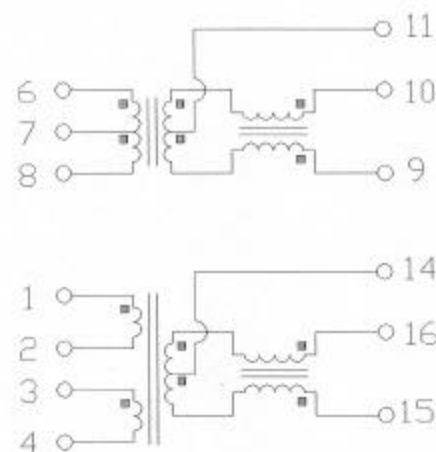

3. ELECTRICAL SPECIFICATIONS:

HIPDT: 1500 VAC (1-4 TO 16-15) Connect 2-3

HIPDT: 1500 VAC (1-4 TO 16-15) Connect 2-3

Turn Ratio (1-2):(3-4):(16-15) = 1:1:1 CT

Turn Ratio (6-7-8):(10-11-9) = 2CT:1CT

DCL(1-2)x(3-4)=(16-15): 350uH Min. @100KHz 100mV 8mADC

DCL(10-9): 350uH Min. @100KHz 8mADC

Leakage Inductance: 1.0uH Max. @1-2 (Short 16-15)

Leakage Inductance: 1.5uH Max. @6-8 (short 10-9)

Cw/w (1-2 TO 16-15)=(3-4 TO 16-15): 20pF Max.

Cw/w (6-8 TO 10-9): 25pF Max.

DC Resistance (1-2)=(3-4): 0.9 Ohms Max.

DC Resistance (16-15)=(10-9): 1.1 Ohms Max.

DC Resistance (6-8): 1.1 Ohms Max.

UNICOM UNLESS OTHERWISE SPECIFIED TOLERANCES ±0.010 Inch	Title: 100BASE-TX FILTER MODULES	
	P/N:	REV.
	2HT16-32	A
	DWN.	
	CHK.	
	APP.	

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE