



3. ELECTRICAL SPECIFICATIONS:

Turns Ratio: PRI/SEC TX 1.25CT:1CT RX 1:1
 Isolation Voltage: 1500 Vrms (Input to Output)
 DC Resistance: 0.90 Ohms Max.
 SEC OCL: 350uH Min. @100KHz, 100mV 8mADC
 Leakage Inductance: 0.4uH Max. @100KHz 100mV
 PRI/SEC Cw/w: 20pF Typical @100KHz 100mV
 Crosstalk: -38dB Min. @100KHz-100MHz
 CMRR: -37dB Typical

2. DIMENSIONS:

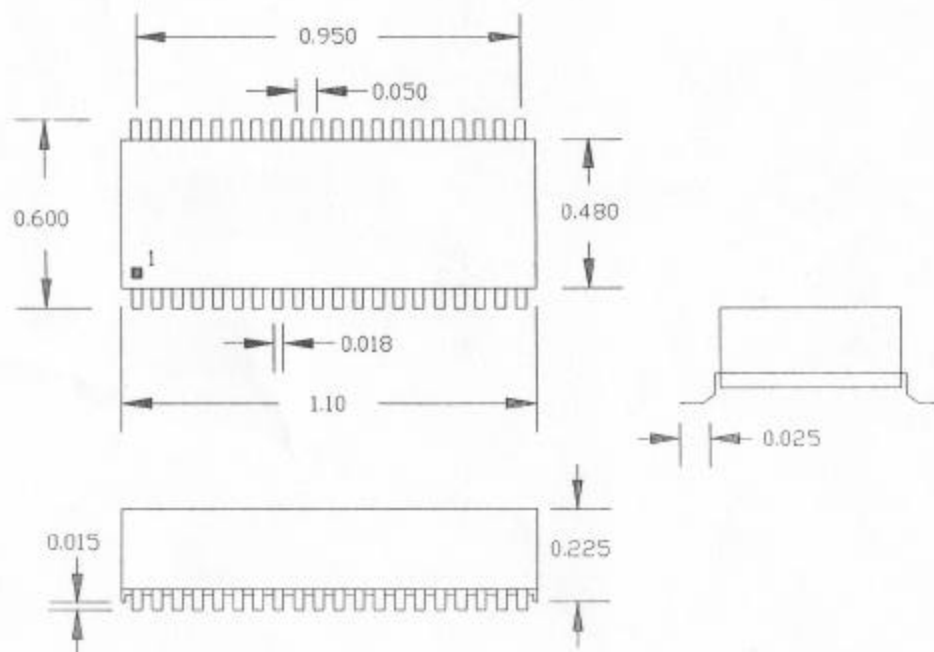

1. SCHEMATIC:

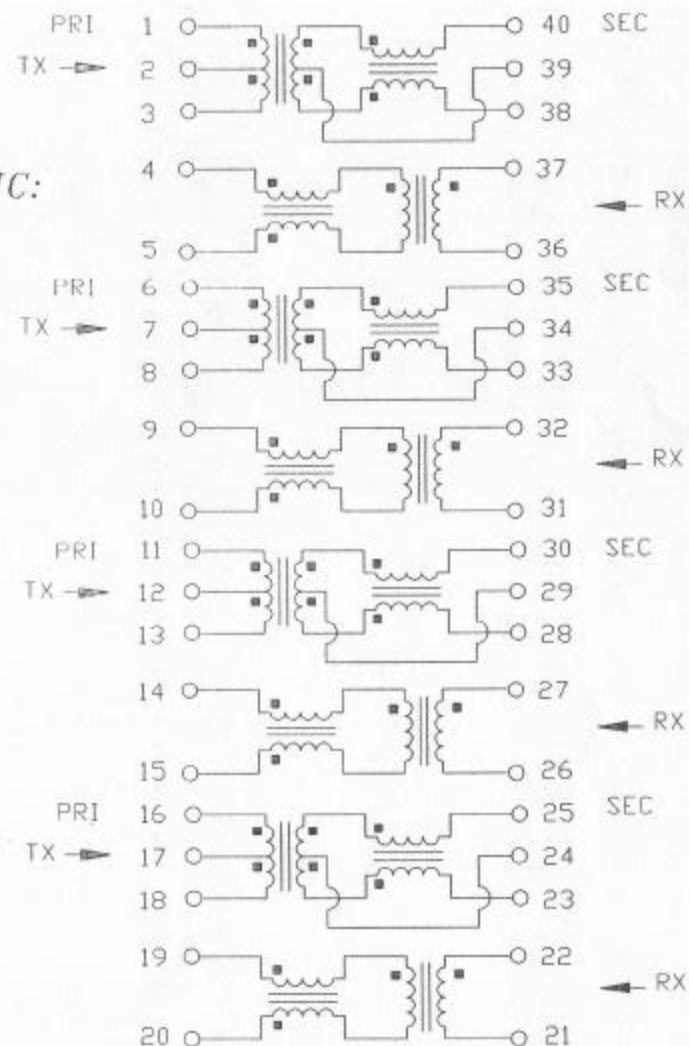

UNICOM	Title: QUAD PORT 10/100 BASE-TX MODULE	
	P/N: 4HT40-44	REV. A
	UNLESS OTHERWISE SPECIFIED TOLERANCES	
	±0.010 Inch	
	DWN.	
	CHK.	
	APP.	

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.