



3. ELECTRICAL SPECIFICATIONS:

Turns Ratio: TX 1CT:1CT RX 1:1
 Isolation Voltage: 1500 Vrms (Input to Output)
 DC Resistance: 0.90 Ohms Max.
 PRI OCL: 350uH Min. @100KHz, 100mV 8mADC
 Leakage Inductance: 0.40uH Max. @1MHz
 PRI/SEC Cw/w: 15pF Typical @100KHz 100mV
 Insertion Loss: -1.1dB Max. @1-125MHz
 Return Loss: 100KHz-60MHz -18dB Typ.(TX) / -17dB Typ.(RX)
 60MHz-100MHz -13dB Typ.(TX) / -15dB Typ.(RX)
 Crosstalk: -38dB Min.
 CMMR: -40dB Typical

2. DIMENSIONS:

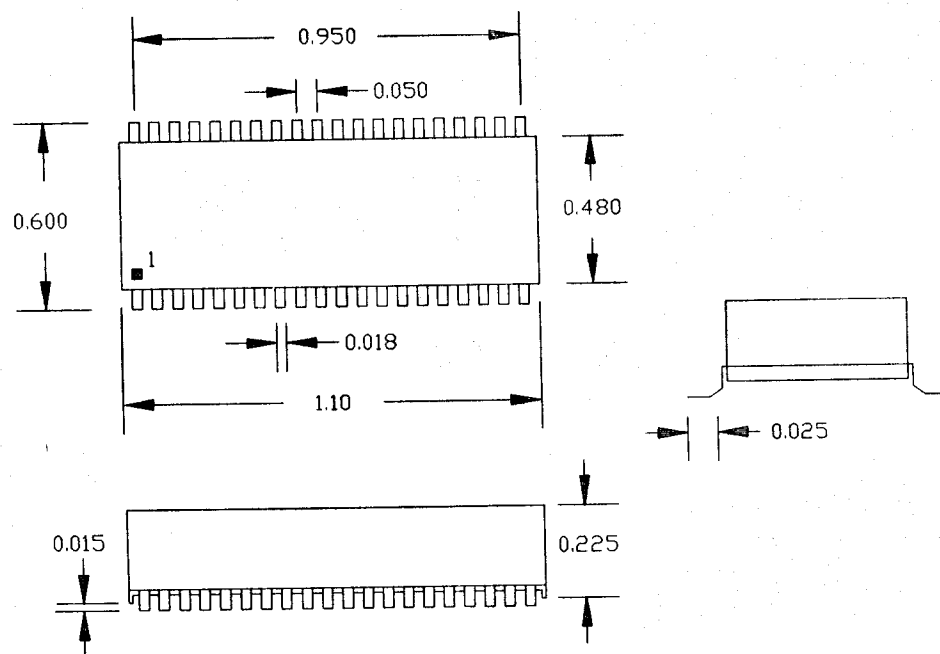

1. SCHEMATIC:

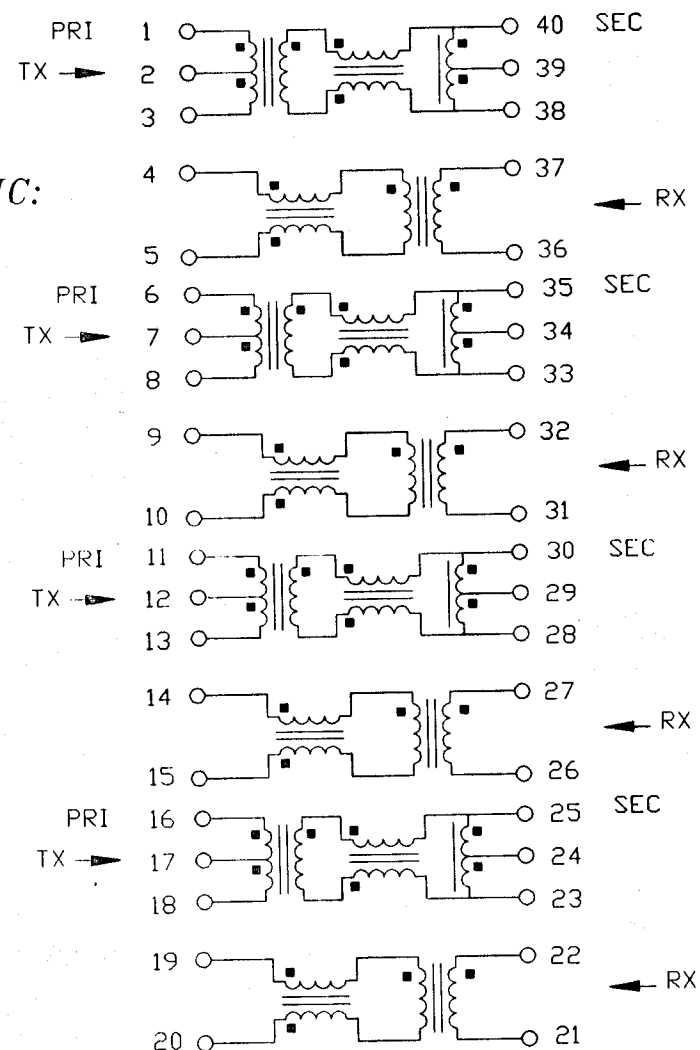

UNICOM	Title: QUAD PORT 10/100 BASE-TX MODULE	
	P/N: 4HT40-60	REV. A
	UNLESS OTHERWISE SPECIFIED TOLERANCES	
	±0.010 Inch	
	DWN.	
	CHK.	
	APP.	

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.